

ED-32X



Projector packed full of practical functions for education and business

[Features]

- 225W UHP Lamp, XGA resolution
- Simple interface-2 Analog Computer inputs^{*1} *1 : Varies according to usage environment
- Direct Power On/Off
- Equalizing Gamma/Color temperature
- Template
- Projector control with RS-232C commands

[Cost of ownership]


- High Performance Air Filter (Up to 5,000hour^{*2} use with no cleaning) *2 : Varies according to usage environment
- Lamp power saving mode - Eco, Intelligent Eco and Saver

[Flexible installability]

- x1.2 optical zoom
- Vertical Keystone
- Ceiling Mount/Desktop top installation

[Anti-theft features]

- PIN iLock, Security Bar / Security Slot, Key Lock






HITACHI
Inspire the Next

ED-32X Technical Specification



ED-32X

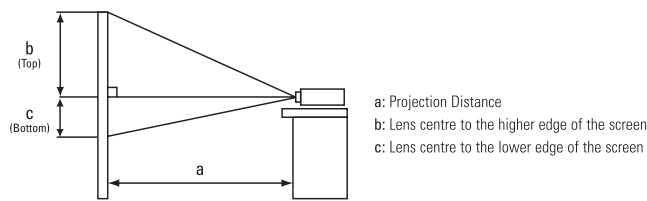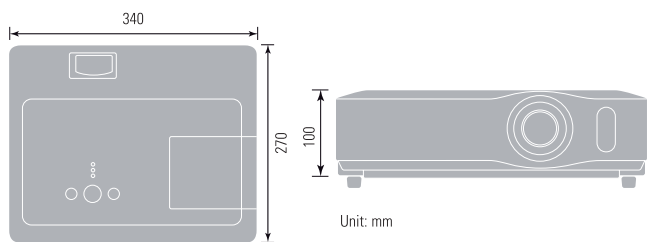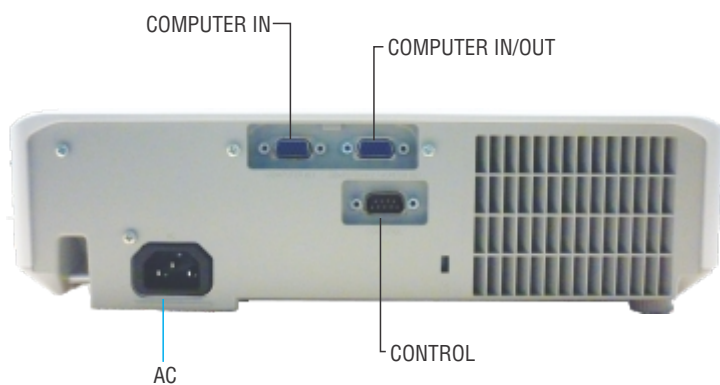

| Image Size 4:3 | | | | |
|---------------------------|-------------------------|-----------|--------------------|------------|
| Screen Size (Diagonal) | Projection Distance (a) | | Screen Height (cm) | |
| | min. (m) | max.. (m) | b (top) | c (bottom) |
| 40" (1.0) | 1.4 | 1.7 | 57 | 2 |
| 60" (1.5) | 2.1 | 2.6 | 85 | 3 |
| 100" (2.5) | 3.6 | 4.3 | 142 | 4 |
| 200" (5.1) | 7.2 | 8.7 | 283 | 9 |
| 250" (6.4) | 9.1 | 10.9 | 354 | 11 |
| 300" (7.6) | 10.9 | 13.1 | 425 | 13 |

OPTICAL

| | |
|--------------------------------------|-------------------------------|
| Model name | ED-32X |
| Product name | Liquid crystal projector 3LCD |
| Liquid Crystal Panel | 768,431 pixels (1024 x 768) |
| Lamp | 225W UHP |
| Light output (brightness) | 3200lm |
| Contrast ratio (Prsentation mode) | 2000:1 |
| Speaker | No |

COMPATIBILITY

| | |
|--------------------|-----|
| Display resolution | XGA |
| Video | No |

POWER

| | |
|-------------------|---------------------|
| Power supply | AC 100V-120V / 3.3A |
| /Rated current | AC220-240V / 1.6A |
| Power consumption | 320W |
| Temperature range | 5~35°C |

PHYSICAL

| | |
|--------------------|---------------|
| Dimensions (WxHxD) | 323x95x245 mm |
| Weight (mass) | 2.9 kg |

CONNECTIONS

| | |
|--------------------|---------------------------|
| Terminals | |
| Computer In | 15-pin Mini-D-sub x 1 |
| Computer In/Out | 15-pin Mini-D-sub x 1 |
| Composite Video In | No |
| Control(RS232C) | D-sub 9-pin connector x 1 |
| Audio In | No |

OTHERS

| | |
|-----------------------|------------------|
| Lamp Life | 10000/5000hr |
| Filter cleaning cycle | 5000hr |
| Altitude | up to 10,000feet |

OPERATION PARTS

| | |
|------|---------|
| Lamp | DT01481 |
|------|---------|

—Design and specifications are subject to change without notice.

Hitachi India Pvt Ltd.

Units 305-306, 3rd Floor, DLF Tower-A, Jasola District Centre, New Delhi-110025, India
For more information visit : www.hitachiconsumer.com/in, www.hitachi.co.in
or Call : 18001020092 (Toll Free) / 011-40605235, 45515500 or E-mail : sales@hitachi.co.in

